


Cables Cobre

Flexible bare copper

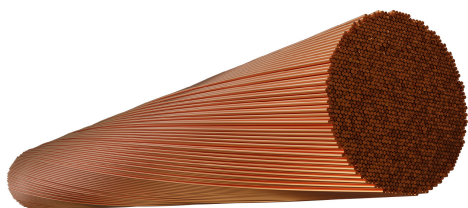

Description

These bare copper cables are indicated for executing earthing installations of electrical devices in both domestic and industrial installations.

Reference Standards UNE-EN 60228, EN 60228 and IEC 60228

Applications

Suitable for:

- Earthing installations

Technical Characteristics



Sede ZARAGOZA
T. 976 500 120
info@rct.es

Delegación BARCELONA
T. 933 079 562
barna@rct.es

Delegación MADRID
T. 916 918 548
madrid@rct.es

Delegación SEVILLA
T. 954 354 946
sevilla@rct.es

Delegación VALENCIA
T. 963 759 070
valencia@rct.es

cablesrct.com

Dimensions

Section (mm ²)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight(kg/km)
1x0,75	26	1,1	1000
1x1	19,5	1,27	1000
1x1,5	13,3	1,48	1017
1x2,5	7,98	1,95	20
1x4	4,95	2,5	31
1x6	3,3	3	47
1x10	1,91	3,95	81
1x16	1,21	5	127
1x25	0,78	8,8	196
1x35	0,554	7,3	280
1x50	0,386	8,8	404
1x70	0,272	10,5	570
1x95	0,206	11,95	746
1x120	0,161	13,6	953
1x150	0,129	15,25	1188
1x185	0,106	17	1434
1x240	0,0801	19,5	1951
1x300	0,0641	22	2394
1x400	0,0486	25,1	3138
1x500	0	28,5	1005
1x555	0	34	956
1x575	0	32	1001