


Cables Instrumentación

H05VVC4V5-F

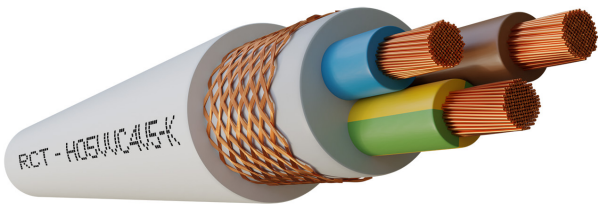

Description

H05VVC4V5-K cables are suitable for permanent installations where electromagnetic protection is required to avoid parasitic currents. They are useful in applications for the control and command of inverters, solenoid valves, machine and logic controller start-up, power switches, as well as temperature, current or voltage regulation in motorised valves. Their high versatility makes them suitable for complex and highly difficult installations.

Reference Standards UNE 21031-13 and HD 21.13S1

Applications

- Suitable for the following installations:
- Data communication systems
 - Control and signal in electronics
 - Computer systems
 - Weighing equipment, etc.

Technical Characteristics

1. Conductor	Flexible electrolytic copper conductor (Class V) according to BS EN 60228:2005 (previously BS6360) and UNE 60228
2. Insulation	PVC type A in compliance with UNE 21031-13 and HD 21.13S1
4. Metallic armour	Copper braid on polyester sheet
5. Sheath	PVC with nitrile rubber additive, TM-5 type resistant to oils in compliance with UNE 21031-13 and HD 21.13S1
Nominal voltage	300/500V
Test voltage	2.000 V A.C.
Maximum temperature	70 °C
Colours	According to UNE 21089 and HD 308 S2 (colour-marked for less than five drivers), UNE-EN 50334 and EN 50334 (marked by registration for more than five drivers)
No flame spread	According to UNE-EN 60332-1-2, EN 60332-1-2 and IEC 60332-1-2
Other characteristics	White casing RAL 9010 and grey casing RAL 7000

The information contained on this page is for information only and does not constitute a contractual commitment of any kind from Cables RCT. 17 de julio de 2024
Cables RCT, as a consequence of his continuous improvement process, may modify any technical specification without further notice.



Sede ZARAGOZA
T. 976 500 120
info@rct.es

Delegación BARCELONA
T. 933 079 562
barna@rct.es

Delegación MADRID
T. 916 918 548
madrid@rct.es

Delegación SEVILLA
T. 954 354 946
sevilla@rct.es

Delegación VALENCIA
T. 963 759 070
valencia@rct.es

cablesrct.com

Dimensions

Section (mm2)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight(kg/km)
2x0,5	39	8	90
2x0,75	26	8,2	97
2x1	19,5	8,4	104
3x0,5	39	8,4	102
3x0,75	26	8,5	108
3x1	19,5	9	123
4x0,5	39	8,75	112
4x0,75	26	9,3	129
4x1	19,5	9,8	147
5x0,5	39	9,8	137
5x0,75	26	10,2	154
5x1	19,5	10,7	174
6x0,5	39	10,4	153
6x0,75	26	11	176
6x1	19,5	11,6	201
7x0,5	39	11,5	190
7x0,75	26	12,1	217
7x1	19,5	12,6	243
12x0,5	39	13,8	273
12x0,75	26	14,3	306
12x1	19,5	15,3	361