

Cables 450/750 V

H07V2-U



Description

Used for internal wiring of control equipment, in those places where special high temperature behaviour is required.


Reference Standards UNE-EN 50525-2-31, EN 50525-2-31

Applications

- Suitable for following installations:
- Internal or external wiring for electrical or electronic equipment.
 - Installations in premises with special characteristics: premises at high temperature

Technical Characteristics

1. Conductor	Electrolytic copper Class I in accordance with UNE-EN 60228 and EN 60228
2. Insulation	Insulation Polyvinyl Chloride type TI-3 according to UNE-EN 50363-3 and EN 50363-3
Nominal voltage	450/750 V
Test voltage	2.500 V A.C.
Maximum temperature	90 °C
Colors	According to UNE-EN 50525-1 and EN 50525-1
No flame spread	According to UNE-EN 60332-1-2, EN 60332-1-2 and IEC 60332-1-2

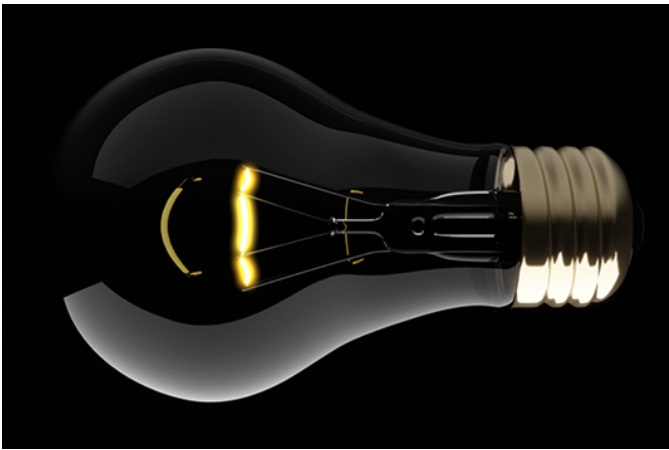

Dimensions

Section (mm2)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight (kg/km)	Class
1x1,5	12,1	2,6	19	
1x2,5	7,41	3,15	29	Eca

The information contained on this page is for information only and does not constitute a contractual commitment of any kind from Cables RCT. 17 de julio de 2024
Cables RCT, as a consequence of his continuous improvement process, may modify any technical specification without further notice.



cablesrct.com

Sede ZARAGOZA T. 976 500 120 info@rct.es	Delegación BARCELONA T. 933 079 562 barna@rct.es	Delegación MADRID T. 916 918 548 madrid@rct.es	Delegación SEVILLA T. 954 354 946 sevilla@rct.es	Delegación VALENCIA T. 963 759 070 valencia@rct.es
--	--	--	--	--