


Cables 0.6/1 kV

RZ1 (AS) 0,6/1 kV CPR

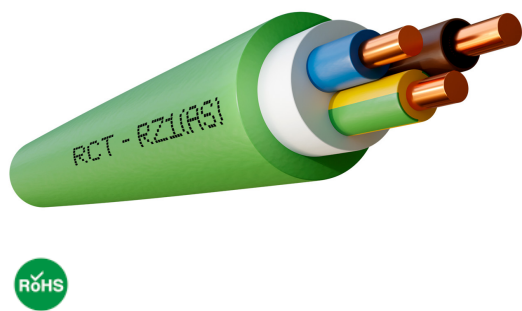

Description

The RZ1 cables comply with the construction product classification criteria according to the EU CPR Regulation 305/2011 and EN 50575, being those recommended to transport and distribute low voltage electrical energy. Recommended for industrial connections, supplies, internal distribution and outdoor connections. They can be used in sub-surface networks and permanent installations.

Reference Standards IEC 60502

Applications

- Suitable for the following installations:
- Sub-surface power source networks for outdoor lighting installations
 - Interior or receptor installations
 - Sub-surface networks for low voltage distribution
 - Electric energy distribution networks. Sub-surface supply lines
 - Installations in premises with special features

Suitable for installations where there is a need to increase protection against fire hazards.

Technical Characteristics

1. Conductor	Rigid electrolytic copper Class I to sections of 10 mm² and class II for greater according to EN 60228 and IEC 60228.
2. Insulation	Cross-linked polyethylene (XLPE), type DIX-3, according to UNE 21123 and HD 60351
3. Sheath	Thermoplastic polyolefin sheath according to HD 603-1
Nominal voltage	0,6/1 kV
Test voltage	3.500 V A.C.
Maximum temperature	90 °C
Colours	According to UNE 21089 and HD 308 S2 (colour-marked for less than five drivers), UNE-EN 50334 and EN 50334 (marked by registration for more than five drivers)
No flame spread	According to UNE-EN 60332-1-2, EN 60332-1-2 and IEC 60332-1-2
Non-spread of fire	According to UNE-EN 60332-3-24, EN 60332-3-24 and IEC 60332-3-24
Non-spread of fire CPR	According to EN 50399
Low halogen content	According to IEC 60754-1 and 60754-2
Low emission of corrosive gases	According to UNE-EN 50267, EN 50267 and IEC 60754-1 and 60754-2
Low emission of opaque fumes	According to UNE-EN 61034-2, EN 61034-2 and IEC 61034-2

The information contained on this page is for information only and does not constitute a contractual commitment of any kind from Cables RCT. 19 de noviembre de 2024
Cables RCT, as a consequence of his continuous improvement process, may modify any technical specification without further notice.



cablesrct.com

Sede ZARAGOZA
T. 976 500 120
info@rct.es

Delegación BARCELONA
T. 933 079 562
barna@rct.es

Delegación MADRID
T. 916 918 548
madrid@rct.es

Delegación SEVILLA
T. 954 354 946
sevilla@rct.es

Delegación VALENCIA
T. 963 759 070
valencia@rct.es

RZ1 (AS) 0,6/1 kV CPR

Dimensions

Section (mm ²)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight (kg/km)	Class
1x1,5	12,1	6,45	56	
1x2,5	7,41	6,74	67	
1x4	4,61	7,35	86	
1x6	3,08	7,95	109	
1x10	1,83	8,8	154	
1x16	1,15	10	212	Cca-s1b,d1,a1
1x25	0,727	11,45	317	Cca-s1b,d1,a1
1x35	0,524	12,8	563	Cca-s1b,d1,a1
1x50	0,387	14,7	580	
1x120	0,153	20,2	1285	
2x1,5	12,1	9,5	133	Cca-s1b,d1,a1
2x2,5	7,41	10,08	164	Cca-s1b,d1,a1
2x4	4,61	11,46	218	Cca-s1b,d1,a1
2x6	3,08	12,56	278	Cca-s1b,d1,a1
2x10	1,83	14,06	389	Cca-s1b,d1,a1
2x16	1,15	16,06	537	Cca-s1b,d1,a1
2x25	0,727	19,26	809	Cca-s1b,d1,a1
2x35	0,524	21,96	1072	Cca-s1b,d1,a1
3x1,5	12,1	10,13	157	Cca-s1b,d1,a1

Section (mm ²)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight (kg/km)	Class
3x2,5	7,41	10,73	189	Cca-s1b,d1,a1
3x4	4,61	12,01	257	Cca-s1b,d1,a1
3x6	3,08	13,19	333	Cca-s1b,d1,a1
3x10	1,83	14,73	478	Cca-s1b,d1,a1
3x16	1,15	17,1	679	Cca-s1b,d1,a1
3x25	0,727	20,41	1026	Cca-s1b,d1,a1
4x1,5	12,1	10,76	180	Cca-s1b,d1,a1
4x2,5	7,41	11,46	224	Cca-s1b,d1,a1
4x4	4,61	12,91	306	Cca-s1b,d1,a1
4x6	3,08	14,26	406	Cca-s1b,d1,a1
4x10	1,83	16,09	596	Cca-s1b,d1,a1
4x16	1,15	18,48	841	Cca-s1b,d1,a1
4x25	0,727	22,35	1289	Cca-s1b,d1,a1
5x1,5	12,1	11,77	214	Cca-s1b,d1,a1
5x2,5	7,41	12,55	268	Cca-s1b,d1,a1
5x4	4,61	13,95	349	Cca-s1b,d1,a1
5x6	3,08	15,44	467	Cca-s1b,d1,a1
5x10	1,83	17,49	700	Cca-s1b,d1,a1
5x16	1,15	20,16	1018	Cca-s1b,d1,a1
5x25	0,727	24,48	1581	Cca-s1b,d1,a1

