


Cables Cobre

Rigid bare copper

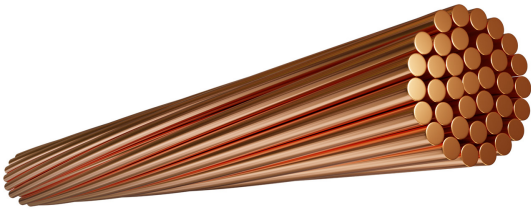

Description

These bare copper cables are indicated for executing earthing installations of electrical devices in both domestic and industrial installations.

Reference Standards UNE-EN 60228, EN 60228 and IEC 60228

Applications

- Suitable for:
- Earthing installations

Technical Characteristics

Conductor	Electrolytic copper conductor (Class II) according to BS EN 60228:2005 (previously BS6360) and EN 60228.
-----------	--

The information contained on this page is for information only and does not constitute a contractual commitment of any kind from Cables RCT. 17 de julio de 2024
Cables RCT, as a consequence of his continuous improvement process, may modify any technical specification without further notice.



Sede ZARAGOZA
T. 976 500 120
info@rct.es

Delegación BARCELONA
T. 933 079 562
barna@rct.es

Delegación MADRID
T. 916 918 548
madrid@rct.es

Delegación SEVILLA
T. 954 354 946
sevilla@rct.es

Delegación VALENCIA
T. 963 759 070
valencia@rct.es

cablesrct.com

Dimensions

Section (mm ²)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight(kg/km)
1x1,5	12,1	1,55	14
1x2,5	7,41	1,98	22
1x4	4,61	2,5	34
1x6	3,08	2,95	50
1x10	1,83	3,69	86
1x16	1,15	4,535	134
1x25	0,727	6,3	205
1x35	0,524	7,55	290
1x50	0,387	9	436
1x70	0,268	10,1	621
1x95	0,193	11,9	859
1x120	0,153	13,1	1043
1x150	0	14,74	1298
1x185	0	16,6	1596
1x240	0	18,75	2187
1x300	0	21,3	2617
1x400	0	26	3552
2x50	0,387	8,9	432