


Cables 0.6/1 kV

U-1000 R2V 0,6/1kV

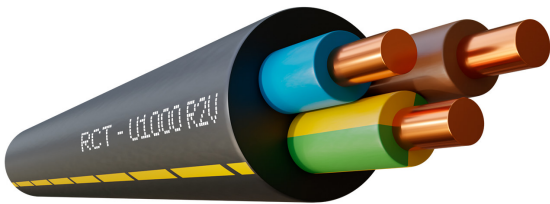

Description

These cables are indicated for the transport and distribution of low voltage electricity. Recommended for industrial connections, service connections, internal distribution and outdoor connections. It can be used in underground networks and permanent installations.

Reference Standards UNE 21123, HD 603 S1 and IEC 60502

Applications

Appropriate for the following installations:

- Underground networks for low voltage distribution
- Underground supply networks for outdoor lighting installations electricity distribution networks
- Underground service connectionsIndoor or receiver installations
- Installations in premises with special characteristics

Technical Characteristics

1. Conductor	Electrolytic copper conductor, Class I and II, according to BS EN 60228:2005 (previously BS6360) and UNE 60228.
2. Insulation	Cross-linked polyethylene (XLPE), type DIX-3, according to UNE 21123 and HD 603S1
3. Sheath	PVC sheath, type DMV-18, according to HD 603S1.
Nominal voltage	0,6/1 kV
Test voltage	3.500 V A.C.
Maximum temperature	90 °C
Section identification	1.5 pink; 2.5 pale yellow; 4 violet; 6 turquoise blue; 10 brown; 16 gray; 1.5 red; 2.5 yellow; 4 violet; 6 turquoise blue; 10 brown; 16 gray
Colours	Colours according to NF C32-321
No propagación de la llama	According to NF C32-070, UNE-EN 60332-1-2, EN 60332-1-2 et IEC 60332-1-2

The information contained on this page is for information only and does not constitute a contractual commitment of any kind from Cables RCT. 17 de julio de 2024
Cables RCT, as a consequence of his continuous improvement process, may modify any technical specification without further notice.



Sede ZARAGOZA
T. 976 500 120
info@rct.es

Delegación BARCELONA
T. 933 079 562
barna@rct.es

Delegación MADRID
T. 916 918 548
madrid@rct.es

Delegación SEVILLA
T. 954 354 946
sevilla@rct.es

Delegación VALENCIA
T. 963 759 070
valencia@rct.es

cablesrct.com

U-1000 R2V 0,6/1kVDimensions

Section (mm2)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight (kg/km)	Class
1x1,5	12,1	4,81	36	Eca
1x2,5	7,41	5,06	45	Eca
1x4	4,61	5,55	62	Eca
1x6	3,08	6,35	87	Eca
1x10	1,83	7,1	128	Eca
1x16	1,15	8,36	184	Eca
1x25	0,727	9,88	281	Eca
1x35	0,524	11	371	Eca
1x50	0,387	12,4	528	Eca
1x70	0,268	14,7	743	Eca
1x95	0,193	16,7	1008	Eca
1x120	0,153	18,1	1211	Eca
1x150	0,124	20,34	1514	Eca
1x185	0	22,6	1836	Eca
1x240	0,0775	25,25	2467	Eca
1x300	0	28,7	3001	Eca
1x400	0	32,6	3889	Eca
2x1,5	12,1	8,05	94	Eca
2x2,5	7,41	8,7	119	Eca
2x4	4,61	9,76	164	Eca
2x6	3,08	11,1	221	Eca
2x10	1,83	12,64	325	Eca
2x16	1,15	15,86	527	Eca
2x25	0,727	20,3	845	Eca

Section (mm2)	Resistance at 20°C (Ohm/km)	External Diameter (mm)	Weight (kg/km)	Class
2x35	0,524	21,4	1040	Eca
3x1,5	12,1	8,52	111	Eca
3x2,5	7,41	9,22	145	Eca
3x4	4,61	10,23	200	Eca
3x6	3,08	11,75	275	Eca
3x10	1,83	13,47	417	Eca
3x16	1,15	16,88	667	Eca
3x25	0,727	20,21	1011	Eca
3x35	0,524	22,9	1335	Eca
4x1,5	12,1	9,25	133	Eca
4x2,5	7,41	10,04	176	Eca
4x4	4,61	11,17	245	Eca
4x6	3,08	12,94	345	Eca
4x10	1,83	14,83	523	Eca
4x16	1,15	18,5	836	Eca
4x25	0,727	22,55	1295	Eca
4x35	0,524	25,3	1699	Eca
5x1,5	12,1	10,07	160	Eca
5x2,5	7,41	11,01	215	Eca
5x4	4,61	12,2	298	Eca
5x6	3,08	14,21	422	Eca
5x10	1,83	16,36	644	Eca
5x16	1,15	20,25	1020	Eca
5x25	0,727	25,3	1617	Eca
5x35	0,524	28	2086	Eca

